





iAG800 V2 Series Analog Gateway

Overview

OpenVox iAG800 V2 series Analog Gateway, an upgrade product of the iAG Series, is an open source asterisk-based Analog VoIP Gateway solution for SMBs and SOHOs. With friendly GUI and unique modular design, users may easily setup their customized Gateway. Also secondary development can be completed through AMI (Asterisk Management Interface).

The iAG800 V2 Analog Gateways are comprised of six models: iAG800 V2-4S with 4 FXS ports, iAG800 V2-8S with 8 FXS ports, iAG800 V2-4O with 4 FXO ports, iAG800 V2-8O with 8 FXO ports, iAG800 V2-4S4O with 4 FXS ports and 4 FXO ports, and iAG800 V2-2S2O with 2 FXS ports and 2 FXO ports.

The iAG800 V2 Analog Gateways are developed for interconnecting a wide selection of codecs including G.711A, G.711U, G.729A, G.722, G.726, iLBC, OPUS, ARM, ARM-WB. iAG800 V2 series use standard SIP protocol and compatible with Leading VoIP platform, IPPBX and SIP servers. Such as Asterisk, Issabel, 3CX, FreeSWITCH, BroadSoft and VOS VoIP operating platform.

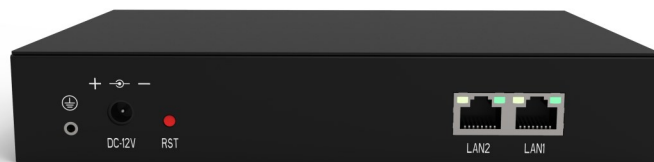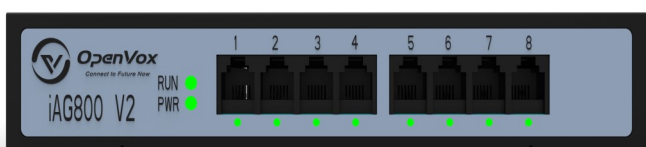

Key features

- 2/4/8 FXS/FXO ports
- Support SNMP
- Support IPv4 and IPv6
- 3km Line Length(MAX)
- Multiple codecs: G.711A/U,G.723.1,G.729A/B, OPUS, ARM and ARM-WB
- Support easy management
- Fully Compatible with leading SIP based VoIP Telephony System

Physical Interfaces

Capacity

- 2/4/8 FXS with RJ11
- 2/4/8 FXO with RJ11

Ethernet Interfaces:

- 1 * WAN, 10/100Mbps, RJ-45
- 1 * LAN, 10/100Mbps, RJ-45

Voice & FAX

- G.711A, G.711U, G.729A, G.722, G.726, OPUS, AMR, AMR-WB
- Comfort Noise Generation(CNG)
- Modem/POS
- Adaptive (Dynamic) Jitter Buffer
- Programmable Gain Control
- DTMF mode: Signal/RFC2833/INBAND
- T.38/Pass-through
- Echo Cancellation(G.168), with up to 128ms

Call Features

- Call Waiting
- Blind Transfer
- Attend Transfer
- Call Forward on Busy
- Call Forward on No Reply
- Unconditional Call Forward
- Warm/Immediately Hotline
- Message Waiting Indicator
- SIP registration to different servers
- Call Hold
- Do-not-disturb
- 3-Way Conference
- Speed Dial

FXS

- Connector: RJ11
- Dial Mode: DTMF and Pulse
- Pulse: 10 and 20 PPS
- Caller ID: DTMF/FSK CLI Presentation
- Max Cable Length: 3 km
- Reversed Polarity Programmable Call Progress Tone

FXO

- Connector: RJ11
- Dial Mode: DTMF/Pulse Dialing
- Caller ID: FSK, DTMF
- Polarity Reversal
- Answer Delay
- Busy Tone Detection
- No Current Detection

Software Features

- Hunting Group
- Web ACL
- Telnet ACL
- Action URL
- PPPoE
- OpenVPN
- Digitmap
- Routing Rules based Prefixes
- Caller/Called Number Manipulation

VoIP

Protocol:

- SIP v2.0 (UDP/TCP), RFC3261
- SDP, RTP(RFC2833), RFC3262, RFC3263, RFC3264, RFC3265, RFC3515, RFC2976, RFC3311
- RTP/RTCP, RFC2198, RFC1889
- IPv4 and IPv6
- Outbound Proxy
- RFC2806 TEL URI
- RFC3581 NAT, rport
- VLAN 802.1P/802.1Q
- RFC4028 Session Timer
- DNS SRV/A Query/NATPR Query
- NAT:STUN, Static/Dynamic NAT

Maintenance

- SNMP v1/v2/v3
- Auto Provisioning
- Web Configuration
- Backup/Restore
- Firmware Upgrade via Web
- CDR
- IPoE
- Syslog(Emerg, alert, critical, error, warning, notice, info, debug)
- Ping/Tracert Test
- Network Capture
- NTP/Daylight Saving Time
- IVR local Maintenance
- Cloud-based Management

OpenVox iAG800 Series Analog Gateway

Product Name	iAG800-202S	iAG800-4S	iAG800-4O	iAG800-4O4S	iAG800-8S	iAG800-8O
--------------	-------------	-----------	-----------	-------------	-----------	-----------

Interfaces

FXS/FXO Ports	2/2	4	4	4/4	8	8
Ethernet port	2 * 10/100Mbps ports					

General Info

Weight	637g
Dimension	190mm*142mm*35mm
Maximum power	12W
Universal Power Supply	12V 2A
Operation Temperature	0°C ~ 50°C
Operation Humidity Range	10% ~ 90% NON-CONDENSING
Storage Temperature Range	-20°C ~ 70°C
Short/Long Haul Ring Load	2 REN, up to 3km on 24AWG line
Certification	CE

OpenVox Communication Co.,Ltd.

Website: www.openvoxtech.com

Add: Room 624, 6/F, Tsinghua Information Port, Book Building, Qingxiang Road, Longhua Street, Longhua District, Shenzhen, Guangdong, China 518109

Copyright©OpenVox Inc. All rights reserved.

